


VICINITY MAP PFP LOCATION: 11401A HIGHLAND RD

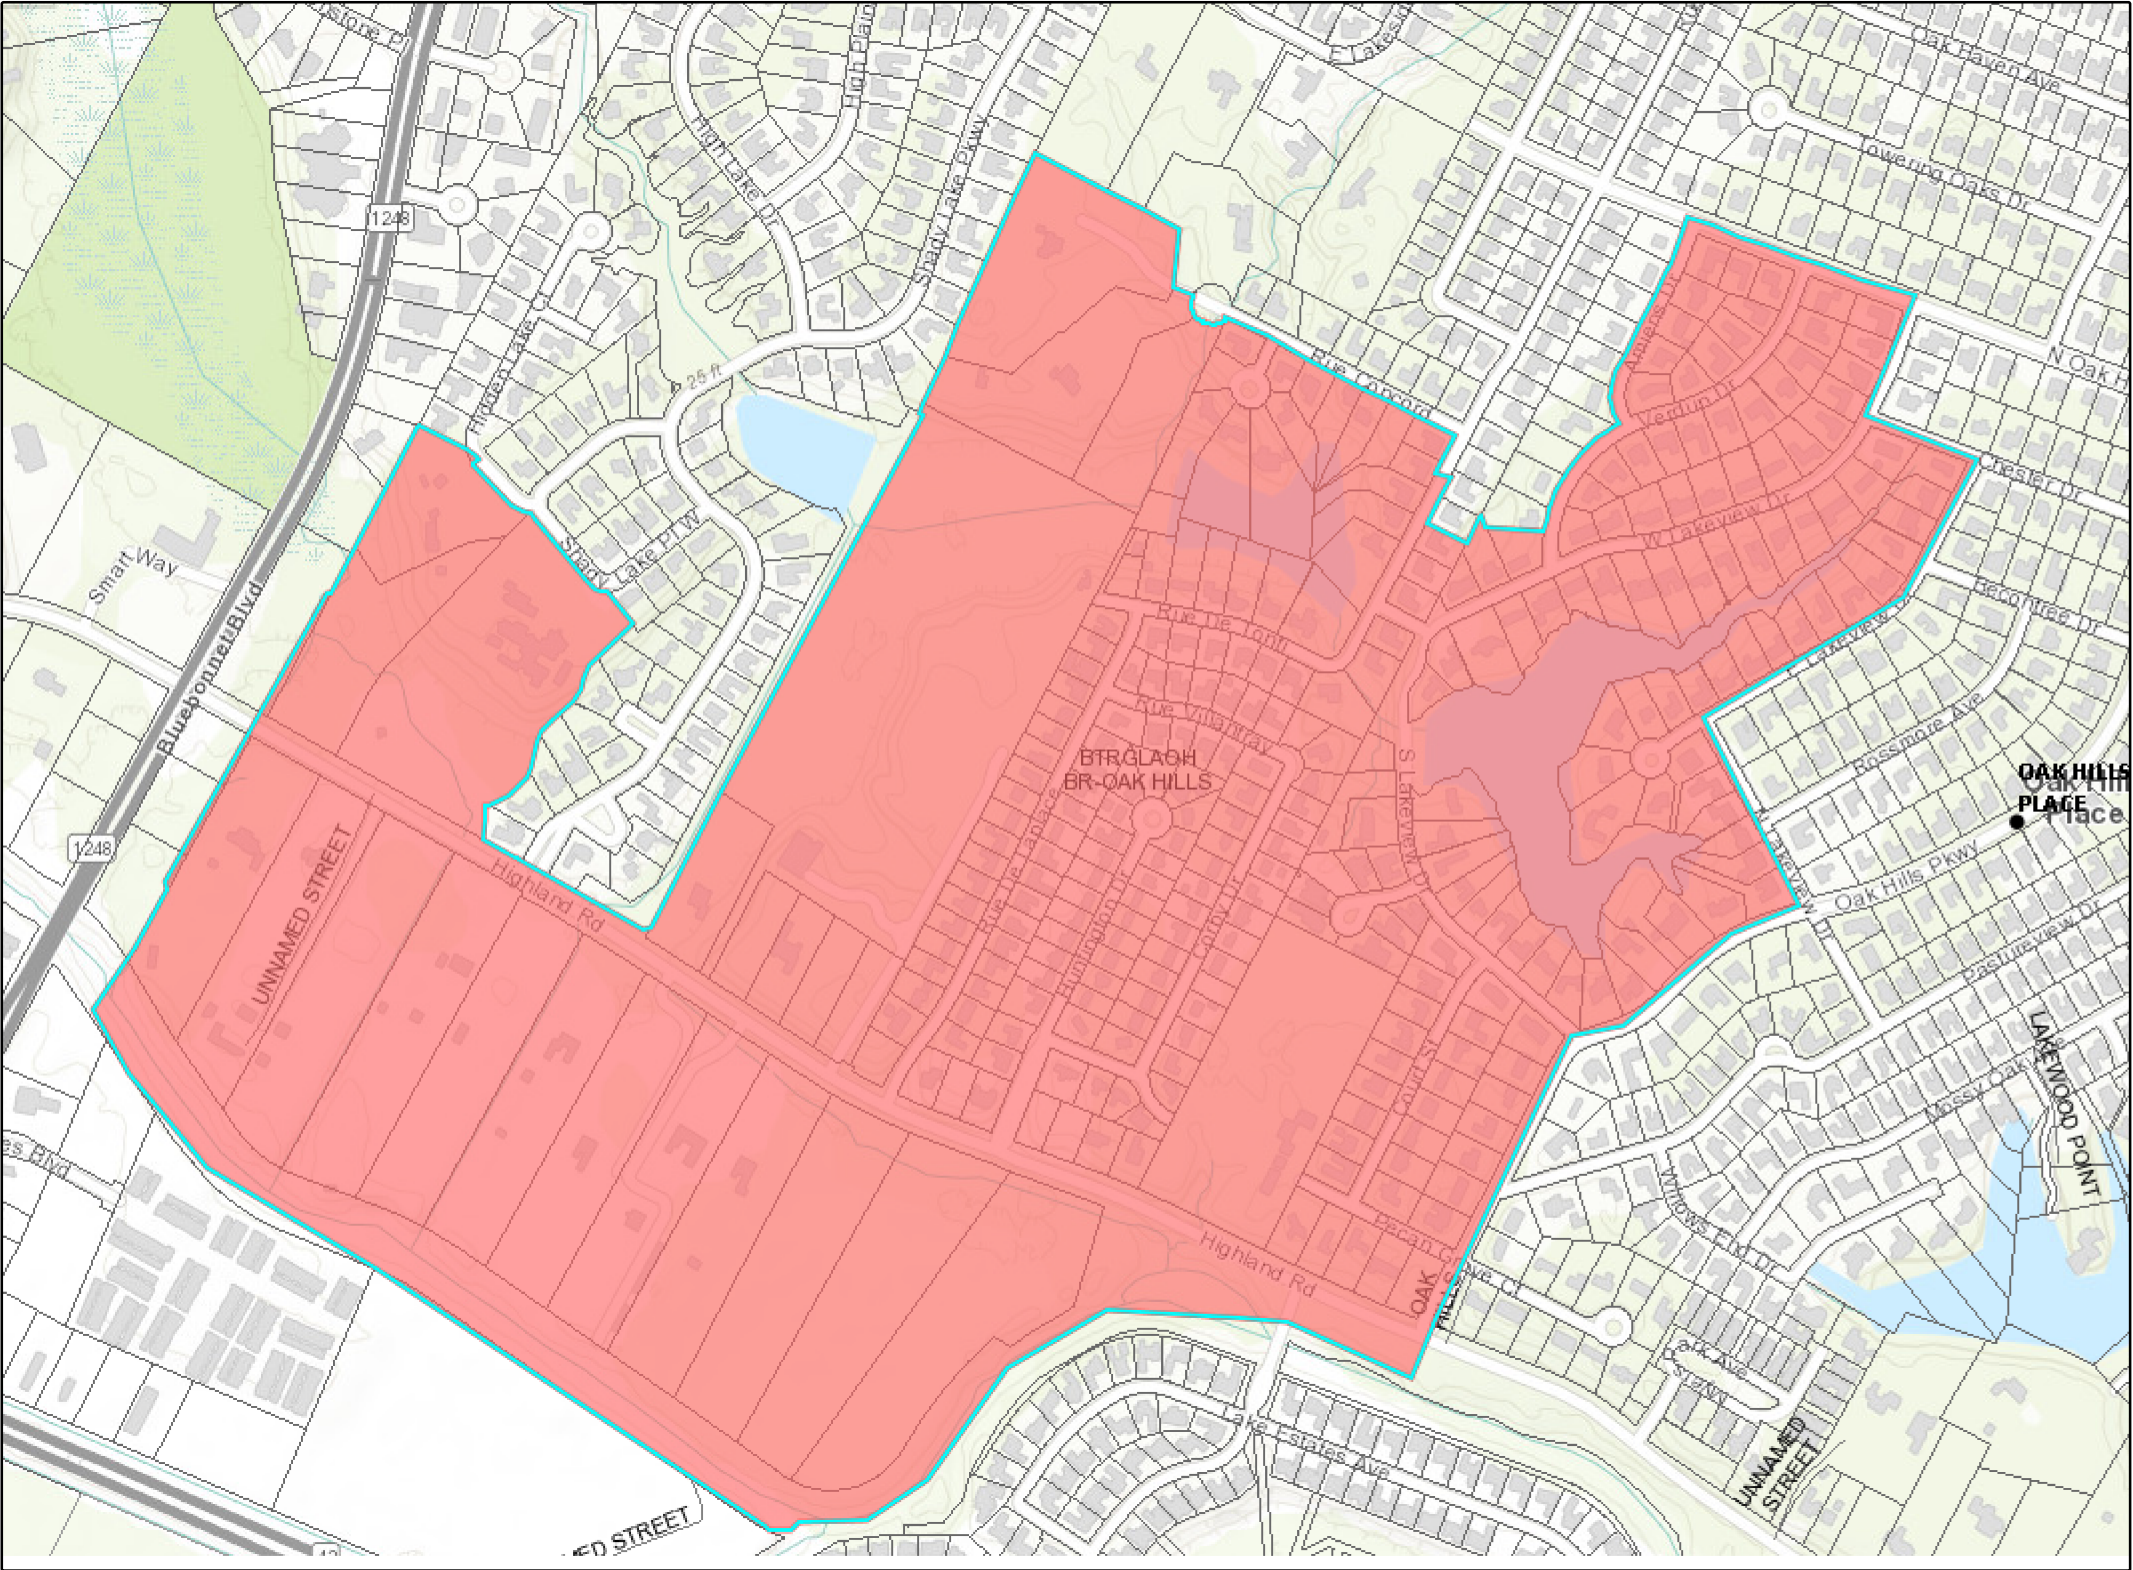

MILESTONES			
1	845C 1 PLMFIP	3	845C 1 READY
2	845C 1 PLMFIS		

NOTES:
1) A DIRECTION OF PLACEMENT (DOP) ARROW HAS BEEN PLACED ON EVERY DWG. IT IS IMPORTANT TO PLACE IN THIS DIRECTION TO AVOID DAMAGE TO PRETERM SPLICES.
2) CORNING HAS BEEN INSTRUCTED TO ADD THE 10'/20' EXTRA FOR CUTTING LENGTH ON THE PFP SIDE OF THE NEW CABLE, CORNING'S FLEX NAP MANUFACTURING PROCESS REQUIRES THE ADDITION OF 15' OR 25' OF CABLE TO FIELD OF ALL FST'S AT

NOTE: HANDHOLE10x15 is Green Space rated. HHOLE17x30x24 is Tier 15 rated. Exceptions and/or Tier ratings for other HHS will be noted at the specific locations.

NOTE: ALL INNERDUCTS ARE TURNED UP +2' AT BOTH ENDS AND ARE TO BE 1.5" DIAMETER NON-LOCATABLE E/W PULLSTRING

(08/15/2024)
REVISION NOTE:
PER CONSTRUCTION REQUEST
SEE PRINT 18, 19, 22, 24, 30

WIRE CENTER: BTRGLAOH
MUNICIPALITY: BATON ROUGE
CONTRACTOR COMPANY: DRAFTPROS
DESIGNER NAME: JOSH MORHAIM
EMAIL: jmorhaim@draftpros.com
PHONE: 786-641-5131

GROUNDING NOTE:
SOIL RESTIVITY VALUE=125 OHM AREA
(2) 8' Grounds Rods, 9' rod depth,
8' rod spacing, 6 AWG buried wire
for Telco, 2 AWG wire for C-RAN

JOINT USE/OTHER UTILITY INFORMATION:		
TYPE	UTILITY NAME	EMERGENCY PHONE
ELECTRIC	COMCAST	800 368-3749
CATV	COMCAST	860-333-5550
WATER	Baton Rouge Water	225-925-2011
GAS	Gas	225-359-6774
SEWER	Baton Rouge Water	225-389-5378

PERMIT REQUIRED:
() FDOT
() CITY OF BATON ROUGE
(X) BATON ROUGE COUNTY
() HOA
() OTHER

NOTE: EML ON MIC
FIBER TESTING INFORMATION (WORST CASE)
Distribution F2 EML - PFP to FST for 1310nm: 3.5
Distribution F2 EML - PFP to FST for 1550nm: 2.7
Total EML OLT to FST for 1310nm: 27.0
Total EML OLT to FST for 1550nm: 25.9

CAUTION:
VOLTAGE TO GROUND
301V TO 15KV

4

PROJECT # A02QBAX		DATE SVC REQ'D 06/21/2024	
NPANNX 225766	GEO LOC KF804	CLLI btrglaoh	
PRIMARY ENGR.: BEARB, JORDAN S			
ENGR. ID: JB004G		PERMIT REQ'D.	Y
PHONE #: 9852493356		PRINT 1	OF 33